


Information on Components Used

Connector / Hood

RS-232C (P.2061 - 2064)
GRPDD Series




Connector	
Manufacturer	Misumi
Model Number	DB-**S*
More Information	OP. 17

EMI Countermeasure Hood	
Manufacturer	Misumi
Model Number	MDA-**H-***
More Information	OP. 30

Plastic Hood	
Manufacturer	Misumi
Model Number	RDA-**H-***
More Information	OP. 30

* GRPDDN / GRPDDJ / GRPDD have no hood

RS-232C (P.2066)

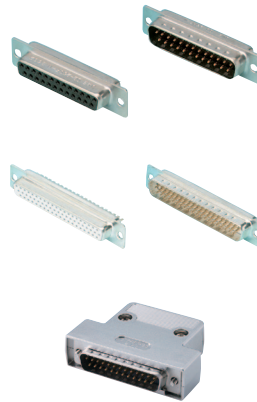


Connector	
Manufacturer	JAE
Model Number	D*-***F-N
Rated Current	5A
Rated Voltage	—
More Information	OP. 16

High-Density Connector	
Manufacturer	Imported Product
Model Number	HD-**S*
Rated Current	5A
Rated Voltage	—
More Information	OP. 21

Hood	
Manufacturer	JAE
Model Number	D*-C8-J**-F*1R
More Information	OP. 29

* BDDN / BDDJ / BDDU have no hood

RS-232C (P.2065)
GRNDD Series



Connector	
Manufacturer	DDK
Model Number	17JE-*****-02-D1
Rated Current	5A
Rated Voltage	AC300V
More Information	OP. 18

Angle Hood	
Manufacturer	DDK
Model Number	17JE-**LH*-1*-CF
More Information	OP. 31

Hood	
Manufacturer	DDK
Model Number	17JE-**H-1*-CF
More Information	OP. 31

* GRNDDN / GRNDDJ / GRNDDU have no hood

RS-232C Cable

Multi-Core Cable

SB Cable



Manufacturer	Misumi
Model Number	SS30WS
Standard Acquired	AWM20276
Rated Temperature	80°C
Flame Retardance	VW-1SC
Bending Radius mm (Fixed Parts)	Finished Outer Diameter x 8
Bending Radius mm (Movable Parts)	—
More Information	OP. 1339

A Cable (RS-232 Series)
E Cable (other pages)



Manufacturer	Misumi
Model Number	NA2464
Standard Acquired	AWM2464
Rated Temperature	0 ~ 80°C
Flame Retardance	—
Bending Radius mm (Fixed Parts)	Finished Outer Diameter x 8
Bending Radius mm (Movable Parts)	—
More Information	OP. 1293

WA Cable



Manufacturer	Misumi
Model Number	MAST-UL20276SB-28
Standard Acquired	ULAWM20276
Rated Temperature	0 ~ 80°C
Flame Retardance	VW-1
Bending Radius mm (Fixed Parts)	Finished Outer Diameter x 10
Bending Radius mm (Movable Parts)	—
More Information	OP. 1333

B Cable



Manufacturer	Misumi
Model Number	OTSCVB
Standard Acquired	UL AWM20620
Rated Temperature	-10 ~ 80°C
Flame Retardance	VW-1
Bending Radius mm (Fixed Parts)	Finished Outer Diameter x 6
Bending Radius mm (Movable Parts)	—
More Information	OP. 1321

NA2935 Cable



Manufacturer	Misumi
Model Number	NA2935
Standard Acquired	UL-2935
Rated Temperature	0 ~ 80°C
Flame Retardance	VW-1
Bending Radius mm (Fixed Parts)	Finished Outer Diameter x 10
Bending Radius mm (Movable Parts)	—
Remarks	With Drain Wire

No single item sales