



V Guide Systems - Overview

90° Type


V Guide System Structure

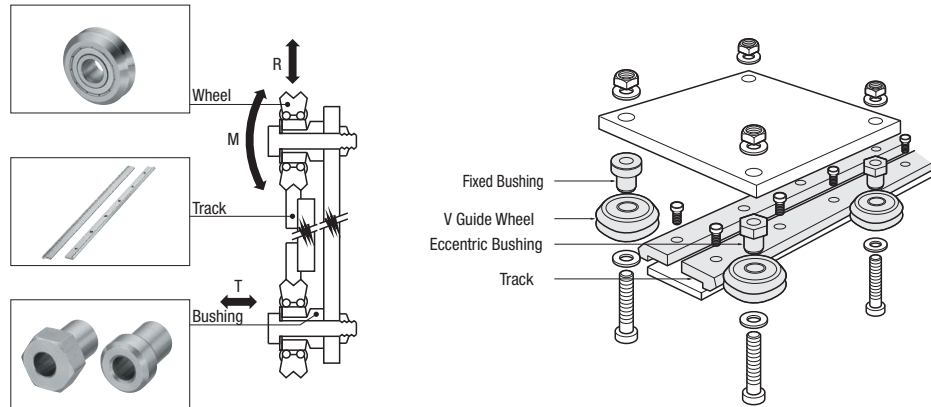

Wheel-Rail Combination Examples

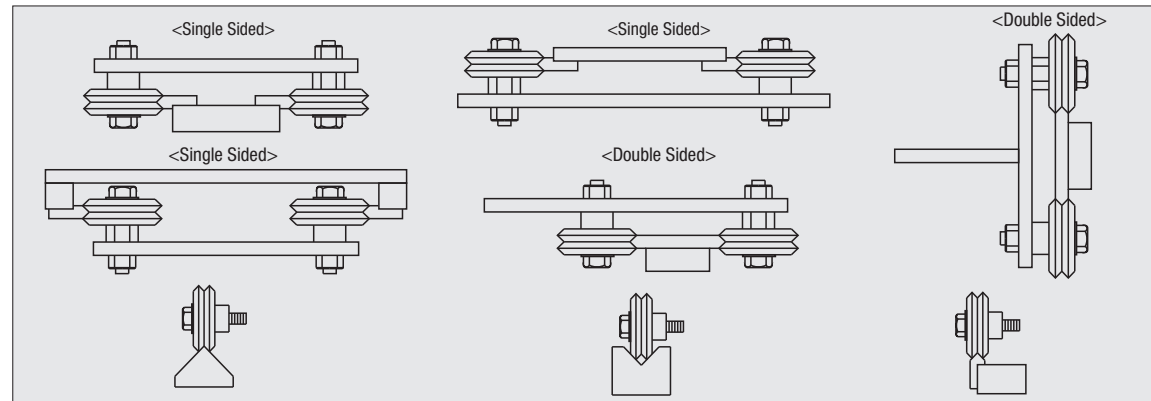


Example

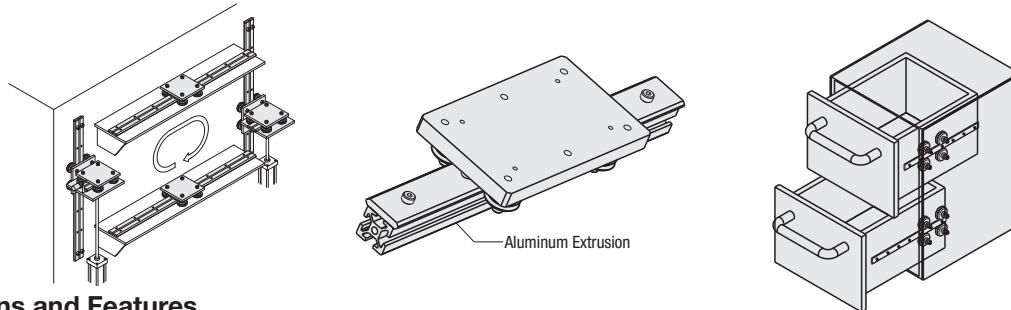


Functions and Features

1. Bearing and V groove (90°) are integrated in a single unit.
2. When using Single Sided Tracks, there is a design freedom for the distance between tracks.
3. When using a Double Sided Track, a system can be structured with only one track.
4. As the wheel circumference is V shaped, they have wiping effect to clean up automatically while rotating on the track. Grease the track sliding surface for longer operational life.
5. Sized in inch.

Mounting Dimensions

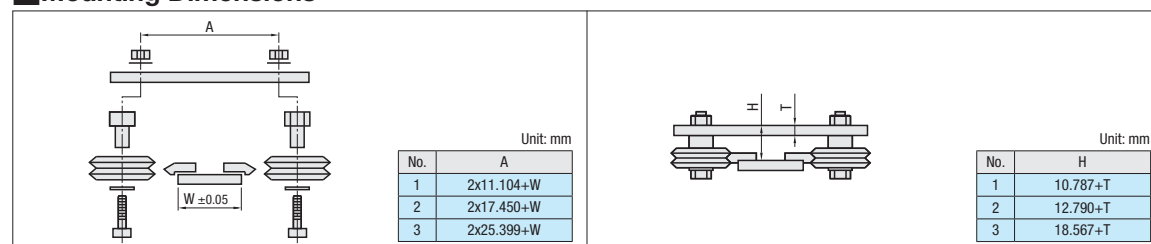

Adjusting Method



1. The accuracy of this system depends on the straightness and parallelism of the support (back plate) on which the track rails are mounted. The corners of the back plate to which a track rail is mounted must be chamfered 0.5mmx0.5mm. The straightness of the track rail depends on the straightness of the back plate. When mounted on precision back plate; ±0.05mm
2. When jointing parallel track rails, give a slight offset to the joint locations. This enables the wheels to travel smoothly over the joints.
3. As the circumference of the wheel is V-shaped, the wheel makes wiping effect when it rotates on the track rail. Therefore, it automatically cleans itself.
4. Greasing on the sliding face of the track rails extends their service life.
5. Fixed bushings determine guide system alignment. Main load must be applied on fixed bushings.
6. Adjust the eccentric bushing by rotating so that the wheel travels on the track rail smoothly, then tighten.

Load Calculation

Calculate the load factor (LF) of the wheel to which the biggest load is applied. Select the wheel whose load factor is less than 1.

$$LF = \frac{LS}{LS_{max}} + \frac{LR}{LR_{max}}$$

LF= Load Factor
 LS_{max} = Maximum Thrust Load
 LR_{max} = Maximum Radial Load
 LS= Thrust Load applied to wheel
 LR= Radial Load applied to wheel


<Calculation Example>

When load applied outside the wheels

$$LS_1 = \frac{LxB}{A+B}$$

$$LS_2 = L - LS_1$$

(Ex.) L=500 (N) A=40 (mm)
 B=60 (mm)
 $LS_1 = \frac{500 \times 60}{40 + 60} = 300$ (N)
 $LS_2 = 500 - 300 = 200$ (N)




When radial and thrust load are combined

$$LS_1 = LS_2 = \frac{LxA}{B}$$

$$LR_1 = L + LS_1$$

$$LR_2 = LS_2$$

(Ex.) L=500 (N) A=60 (mm)
 B=100 (mm)
 $LS_1 = LS_2 = \frac{500 \times 60}{100} = 300$ (N)
 $LR_1 = 500 + 300 = 800$ (N)



Life Calculation

Calculate life of the system and confirm the validation of size selection.

$$Life (km) = \frac{Lc}{(LF)^3} \times Af$$

Lc= Life Span Constant
 Af= Adjustment Coefficient
 LF= Load Factor

<Calculation Example>

When using BVGH3 under the conditions of LS=500 (N), LR=1000 (N) and Af=1

$$Load Factor LF = \frac{500}{1701} + \frac{1000}{5900} = 0.46$$

$$Life (km) = \frac{130}{(0.46)^3} \times 1 = 1335 km$$

* For LR_{max}, and LS_{max}, see P583.

Lc = Life Constant

Wheel Size	Lc(km)
1	55
2	87
3	130

Af = Adjustment Coefficient	Application Conditions
1.0-0.7	Clean, Low Speed, Low Shock, Light Load
0.7-0.4	Medium Level Contamination, Medium Level Shock, Medium Load, Vibration
0.4-0.1	Severe Contamination, High Level Acceleration, Heavy Load, Vibration, High Cycle