

# Trim Seals

Trim Seals are available in 1m increment. Please note that ordering 5 pieces of L=100 means 5 rolls of 100 meter type.

**TRSAT** (Black)  
**TRSBT** (Black)  
**TRSCT** (Black)  
**TRSDT** (Black)

**TRASAB** (Black)  
**TRASAG** (Gray)

**TRBSAB** (Black)  
**TRBSAG** (Gray)

**TRCSAB** (Black)  
**TRCSAG** (Gray)

**Bending Directions**

Rubber Position Y

Rubber Position X

Type	Material			Color
	Main Body	Rubber Part	Internal Metal Strip	
TRS_T	Thermoplastic Elastomer (TPE)	EPDM Synthetic Rubber	Aluminum	Black
TRS_SB	Silicon Rubber	Silicon Rubber	Low Carbon Steel	Black
TRS_SG	Silicon Rubber	Silicon Rubber	Low Carbon Steel	Gray

Part Number Type	T	Rubber Position	L	A	B	C	W	D	t	Minimum Bending Radius mm			Applicable Plate Thickness (T Range)				
										Bending Directions ①	Bending Directions ②	Bending Directions ③					
TRSAT	1.6	X (Solid Line)	L1-L100 (1m Increment)	6.0	14.5	15.4	1.6	9.5	1.3	30	30	30	1.2-2.4				
	3.2			7.6	14.0	17.0	3.2						2.4-4.0				
	4.8			9.2	13.3	18.6	4.8						4.0-5.0				
	6.4			10.8	12.7	20.2	6.4						5.5-6.4				
TRSBT	1.6	Y (Dotted Line)	L1-L100 (1m Increment)	6.0	14.5	17.0	1.6	11.1	1.5	30	30	50	1.2-2.4				
	3.2			7.6	14.0	18.6	3.2						2.4-4.0				
	4.8			9.2	13.3	20.2	4.8						4.0-5.0				
	6.4			10.8	12.7	21.8	6.4						5.5-6.4				
TRSCT	1.6	X (Solid Line)	L1-L100 (1m Increment)	6.0	14.5	21.7	1.6	15.9	2.0	60	60	70	1.2-2.4				
	3.2			7.6	14.0	23.3	3.2						2.4-4.0				
	4.8			9.2	13.3	24.9	4.8						4.0-5.0				
	6.4			10.8	12.7	26.5	6.4						5.5-6.4				
TRSDT	1.6	X (Solid Line)	L1-L100 (1m Increment)	5.4	9.1	12.3	1.6	7.0	1.3	30	30	-	1.2-1.6				
	3.2			9.6	13.2	24.0	4.6					10.0	1.2	95	170	50	1.0-3.2
	4.8			9.6	13.2	20.0	4.6					10.4	1.2	50	50	-	1.0-3.2
	6.4			9.6	13.2	18.5	4.6					6.5	1.2	50	90	35	1.0-3.2

L Dimension is specified in 1mm increment.  
Minimum bending radius value are reference and not guaranteed values. (Applicable to both rubber positions X and Y.)



Ordering Example: Part Number - Rubber Position - L  
**TRSCT1.6** - X - L15  
**TRCSAB3.2** - - L58

Days to Ship [Configure Online](#)

Price [Configure Online](#)

Part Number Type	T	Rubber Position	L	Unit Price/m						
				1-4m	5-9m	10-14m	15-29m	30-74m	75-99m	100m
TRSAT	1.6	X (Solid Line)	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									
TRSBT	1.6	Y (Dotted Line)	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									
TRSCT	1.6	X (Solid Line)	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									
TRSDT	1.6	X (Solid Line)	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									
TRASAB	3.2	-	L1-L75 (1m Increment)							
	4.8									
	6.4									
	6.4									

**EX** Example



Best when rubber O.D. dimension is compressed to 40-60% of the standard dimension.

# Low Rebound Trim Seals

Airtight / Wide Angle

Low Rebound Trim Seals whose rebound force is lower than those of the standard trim seals.  
 Trim Seals are available in 1m increment. Please note that ordering 5 pieces of L=100 means 5 rolls of 100 meter type.

**TRSET**

**TRSUT**

**Bending Directions**

Rubber Position Y

Rubber Position X

Type	Material			Color
	Main Body	Rubber Part	Internal Metal Strip	
TRSET	Thermoplastic Elastomer (TPE)	-	Aluminum	Black
TRSUT	Thermoplastic Elastomer (TPE)	-	Aluminum	Black

Part Number Type	T	Rubber Position	L	A	B	C	W	D	Minimum Bending Radius mm			Applicable Plate Thickness (T Range)
									Bending Directions ①	Bending Directions ②	Bending Directions ③	
TRSET	1.6	X (Solid Line) Y (Dotted Line)	L1-L100 (1m Increment)	6.0	14.7	15.5	1.6	9.5	60	60	70	1.2-2.4
	3.2			7.6	14.2	17.1	3.2					2.4-4.0
	4.8			9.2	13.5	18.7	4.8					4.0-5.0
	6.4			10.8	12.9	20.3	6.4					5.5-6.4
TRSUT	1.6	-	L1-L100 (1m Increment)	6.0	14.7	18.0	1.6	200	200	200	200	1.2-2.4
	3.2			7.6	14.2	3.2	20.2					2.4-4.0
	4.8			9.2	13.5	4.8	19.5					4.0-5.0
	6.4			10.8	12.9	6.4	18.9					5.5-6.4

L Dimension is specified in 1mm increment.  
 Minimum bending radius value are reference and not guaranteed values.  
 TRSUT may deform by bending, resulting in lower shock-absorbing properties. Use in straight parts is recommended.


Ordering Example: Part Number - Rubber Position - L  
**TRSET1.6** - X - L15  
**TRSUT3.2** - - L58

Days to Ship [Configure Online](#)

Price [Configure Online](#)

Part Number Type	T	Rubber Position	L	Unit Price/m						
				1-4m	5-9m	10-14m	15-29m	30-74m	75-99m	100m
TRSET	1.6	X (Solid Line) Y (Dotted Line)	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									
TRSUT	1.6	-	L1-L100 (1m Increment)							
	3.2									
	4.8									
	6.4									

Example: Door with Low Retention Force · Inclined or Angle Varying Surface · Uneven Surface

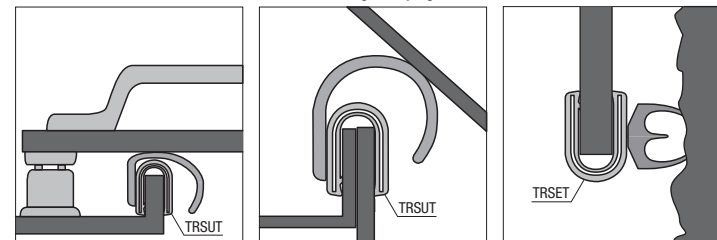

Best when rubber O.D. dimension is compressed to 40-60% of the standard dimension.