


Support Units (Square, Fixed Side)

Compact / Low Profile / Mounting Hole Narrow Pitch

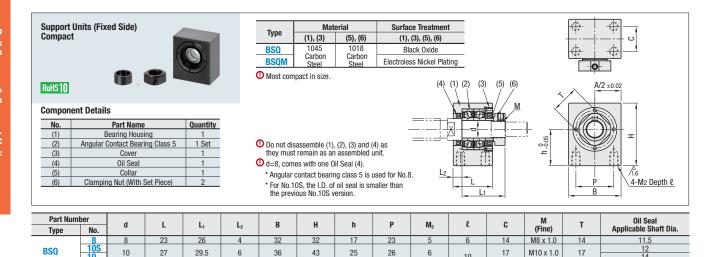

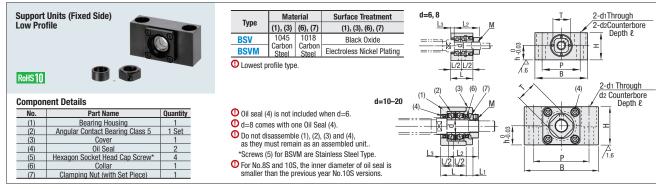

Part Number		И					D	н	h	D	d	d	ρ	М	т	Oil Seal	
Type	No.	u	_	L1	L ₂	L ₃	Ь В	n	"	r	u ₁	a ₂		(Fine)	'	Applicable Shaft Dia.	
BSV BSVM	6	6	20		22.5	3.5	42	22	11	30	5.5	9.5	12	M6 x 0.75	12	_	
	8S	8	23	_	26	4	52	28	14	38	6.6	11	15	M8 x 1.0	14	10	
	10S	10	24	6	29.5	6	70	36	18	52	Q	14	19	M10 x 1.0	17	12	
	10	10	24	0	29.5	0	/0	30	10	32	9	14	19	WITO X 1.0	17	14	
	12	12	24	6	29.5	6	70	36	18	52	9	14	19	M12 x 1.0	19	15	
	15	15	25	6	38	5	80	41	21	60	11	17	21	M15 x 1.0	22	20	
	20	20	42	10	52	10	95	56	28	75	11	17	29	M20 x 1.0	30	25	

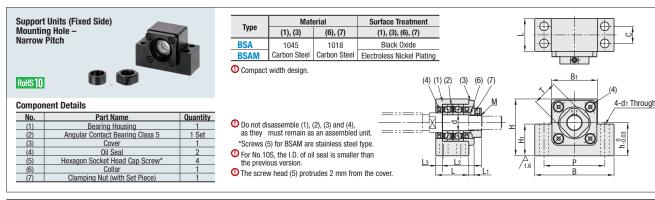

	Part Number					-		В			В	Н	D	•	d	М	-	Oil Seal	
	Туре	No.	a	_	L-1	L ₂	L ₃	В	п	"	D ₁	п1	r	٠	a ₁	(Fine)	'	Applicable Shaft Dia.	
	-	108	10	25		29.5	-	- 00	20	22	2/	21	46	13		M10 x 1.0	17	12	
BSA	10	10	25	4	29.5) 3	60	39	22	34	21	40	13	0.0	WIIU X I.U	17	14		
	BSAM	12	12	25	4	29.5	5	60	43	25	35	24	46	13	6.6	M12 x 1.0	19	15	
	15	15	27	6	38	6	70	48	28	40	27	54	15		M15 x 1.0	22	20		




Part Number BSV10S BSA12

O Store Accessories with care. They are required when assembling.

Support Units (Square, Fixed Side)

Standard Type with Dowel Holes / Fixed Side with Damper

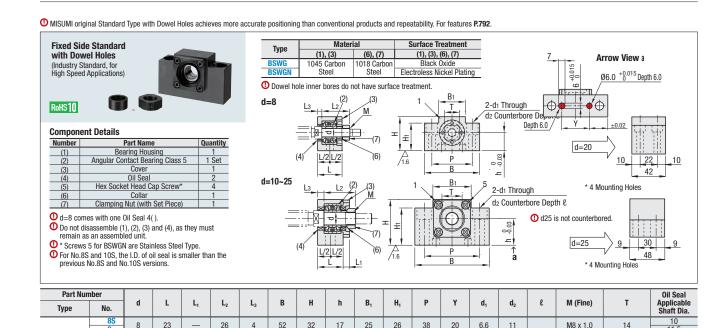

25

26

35

38

52

60

Take care in combining No.20 with BSSZ(K)2510, BSSR(K)2510 and BSST2510 Ball Screws. The ball screw nut may come in contact with the bottom surfaces

52

32

40

43

25

*30

Features of Support Units with Dowel Holes

When mounting support units against dowel pins, care is required when tightening the mounting screws so as not to cause clearances between the pins and the support unit. Using the Support Units with Dowel Holes reduces assembly time as adjustments are eliminated.

23

25

12

15

26

29.5

38

When tightening the mounting screws, clearance between the pins and the wall may be created. If this clearance exists.

Method of Pressing against Externally Placed Dowel Pins Using the Support Units with Dowel Hole As the dowel holes are provided with the Support Units,

20

30

6.6

Part Number Part Number Example

14

17

19

22

15

20


products are filled with low particle generation grease for cleanrooms

M8 x 1.0

M10 x 1.0

M12 x 1.0

M15 x 1.0

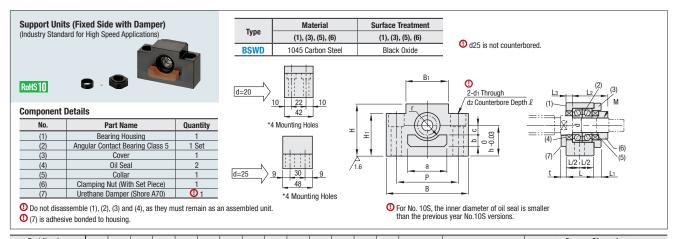

Part Nun	nber	d	١.			١.	В	н	h	B ₁	H,	D	d ₁	d ₂	0	M	Oil Seal	Damper Di			r Dimension	
Туре	No.	u	_	ь,	L ₂	L ₃	В	п			п	r			٤	(Fine)	Applicable Shaft Dia.	а	b	С	r	t
BSWD	1022	10						40	22		32						14					
	10S						43	25		35					M10 x 1.0	12						
	10		12 24	6	29.5	6	70	40	20	36	30	52	9	14 11 14 34 10	10	6	12					
	1223	12						41	23		33					M12 x 1.0	15					10
	12	12						43	25		35					W112 X 1.0						
	1526							46	26		36	60					20	46	12	7	15.5	
	1528	15	25	6	38	5	80	48	28	41	38		11	17	15	M15 x 1.0						
	15							50	*30		40			''	13							
	20	20	42	10	52	10	95	58	30	56	45	75				M20 x 1.0	25	50	15	10	18	
	25	25	48	13	59	14	105	68	35	66	25	85	11	_	_	M25 x 1.5	31	60	19	10	25	

Take care in combining No.20 with BSSZ(K)2510, BSSR(K)2510 and BSST2510 Ball Screws. The Ball Screw Nut may come in contact with the bottom surfaces.

