

[High Precision] Motorized X-Axis - Cross Roller



■Features:X-Axis Stage excellent in lightweight, compactness and accuracy.

☎ For CAD data, see the MISUMI website.

■X-Axis




M Material: Aluminum Alloy
S Surface Treatment: Black Anodize
A AccessoryXCR415: SCB3-16 (4 pcs.)
XCR620:SCB4-16 (4 pcs.)


RoHS10

☎ For Controllers, Handset Terminals, see P.1-1735-93~P.1-1735-94


XCR415-C

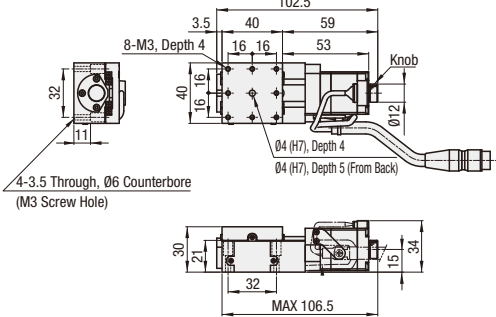


XCR415-PA

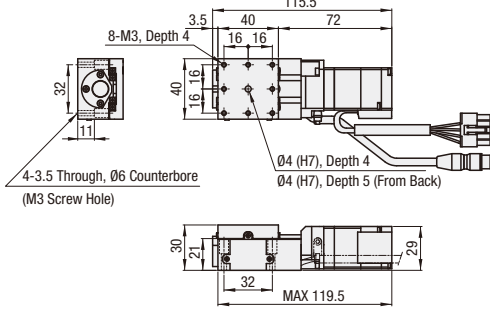


XCR620-C

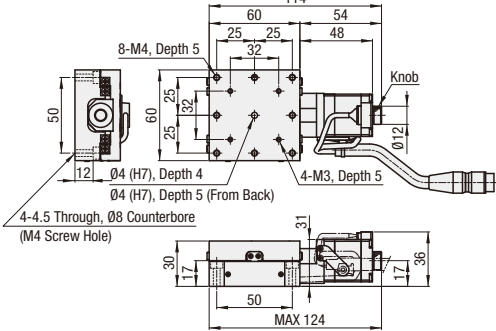


XCR620-F

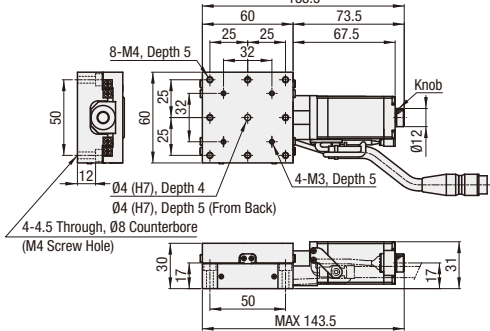

XCR620-G

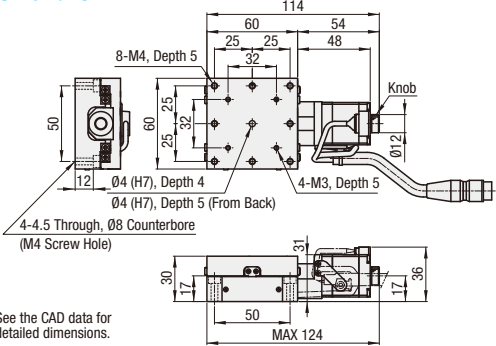

XCR620-PA

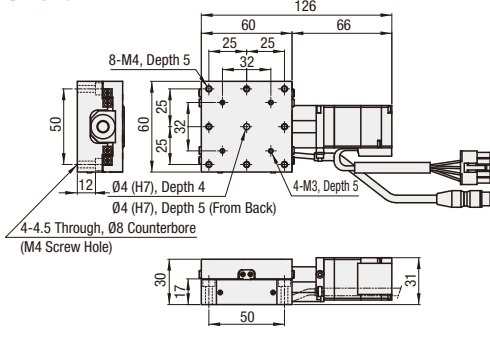

☎ See the CAD data for detailed dimensions.

Part Number		Motor	Cable	Mechanical Standards			Accuracy Standards					
Type	No.			Stage Surface (mm)	Travel Distance (mm)	Weight *1 (kg)	Unidirectional Positioning Accuracy	Moment Rigidity (°/N•cm)			Pitching	Yawing
								Pitching	Yawing	Rolling		
XCR	415	C(Standard) PA*(α-Step)	N(Cable not included (separately sold)) P* (Cable for α-Step Motor) For cables separately sold, see MSCB_ option on P.11-1735-95	40×40	15	0.3	10μm or less	0.33	0.44	0.37	25"	20"
	620	C(Standard) F(High Torque) G(High Resolution) PA*(α-Step)		60×60	20	0.4	5μm or less / Full Stroke	0.15	0.12	0.07	20"	15"

* When the Motor Option PA is selected, the driver is included with as the Set. The cable is available for Option P and is unavailable for Option N (Cable not included).
*1. The value is for C Type of Motor.



Ordering Example

Part Number - Motor - Cable
XCR415 - C - N



Configure Online

■Common Specifications

No.	415	620
Feed Screw	Ball Screw Ø6, Lead 1	Ball Screw Ø8, Lead 1
Guide	Cross Roller Guide	
Positioning repeatability	±0.5μm	
Load Capacity	49N or less	
Lost Motion	1μm or less	
Backlash	0.5μm or less	
Parallelism	30μm or less	
Straightness	3μm or less	
Motion Parallelism	10μm or less	

■Max. Speed

No.	Motor	(mm/sec)
415	C	10
	PA	10
620	C	20
	F	20
	G	20
	PA	20

☎ Note that the speed and positioning time differ depending on the current condition of use.
The speed and positioning time are not guaranteed values but reference values provided by MISUMI.


■Motor/Cable Application Table

Motor	Cable
C, F, G	N (Not Provided)
PA	P


☎ For the cable for C, F or G, see MSCB_ on P.1-1735-95

■Wiring Diagram

•Motor Code: C (Standard), F (High Torque), G (High Resolution) General Connector Pin Configuration

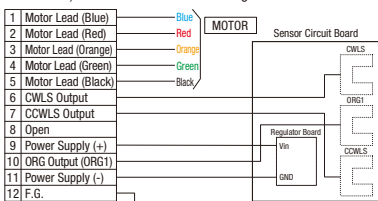


•Motor Code: PA (α-Step) Sensor Connecting Diagram

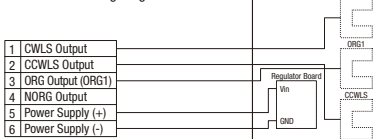


■Connector Pin Configuration

•Motor Code: C (Standard), F (High Torque), G (High Resolution) General Connector Pin Configuration



•Motor Code: PA (α-Step) Sensor Pin Configuration




■Electrical Specifications

Motor		C	F	G	PA
		Standard	High Torque	High Resolution	Stepping-out Prevention
Motor	Type	5-Phase Stepping Motor 0.75A/Phase			α-Step Motor
	Part Number	C005C-90215P	PK525HPB-C1	PK523HPMB-C1	ARM24SAK
	Step Angle	0.72°	0.72°	0.36°	0.36° (When 1000P/R is set)
	Driver Part Number	-			ARD-K
Resolution (Pulse)	Full/Half	2μm/1μm	2μm/1μm	1μm/0.5μm	1μm (When 1000P/R is set)
	Micro Step	0.1μm (upon 1/20 partitioned)	0.1μm (upon 1/20 partitioned)	0.05μm (upon 1/20 partitioned)	-
Connector	Part Number	HR10A-10J-12P (Hirose Electric Co., LTD.)			HR10A-7J-6P (Hirose Electric Co., LTD.)
	Compatible Receptacle Connector	HR10A-10P-12S (Hirose Electric Co., LTD.)			HR10A-7P-6S (Hirose Electric Co., LTD.)
Sensor	Limit Sensor	Provided			
	Home Position Sensor (ORG1)	Provided			
	Slit Home Origin Sensor (ORG2)	Not Provided			
	Part Number	Photomicrosensor: EE-SX4320 (OMRON Corp.)			
	Power Supply Voltage	DC5~24V ±10%			
	Current Consumption	60mA or less			
	Control Output	NPN Open Collector Output DC5~24V, 8mA or less Residual Voltage 0.3V or less (when load current is 2mA)			
		Output Logic			Detecting (Dark): Output Transistor OFF (Non-Conducting)

☎ Sensors with Part Number EE-SX4134 will be discontinued and replaced by next-generation products with Part Number EE-SX4320 from November 2018.

■Timing Chart

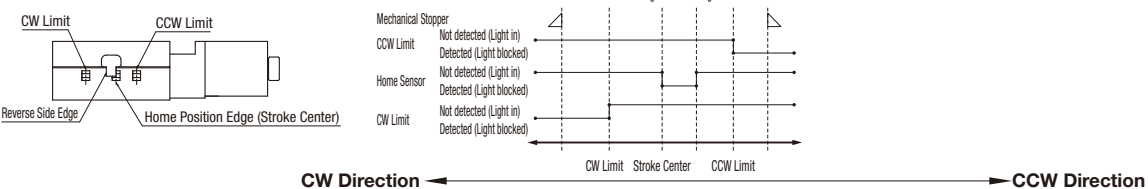

Travel Distance (mm)	Reference Position	Mechanical Limit	CW Limit	Home Position Edge Stroke Center	Other Signal Edge	CCW Limit	Mechanical Limit
15	Homing Position	8.5	7.7	0	2	7.7	8.5
20	Homing Position	11	10.5	0	5	10.5	11

☎ Homing Routine Above: When MSC102/112 Series controller is used and when the Homing Routine Type 4 is executed.

☎ The coordinates shown are design values. There may be approx. ±0.5mm misalignment on the physical dimensions.

☎ For details about Homing, see P.1-1735-97